




## PATTERNS

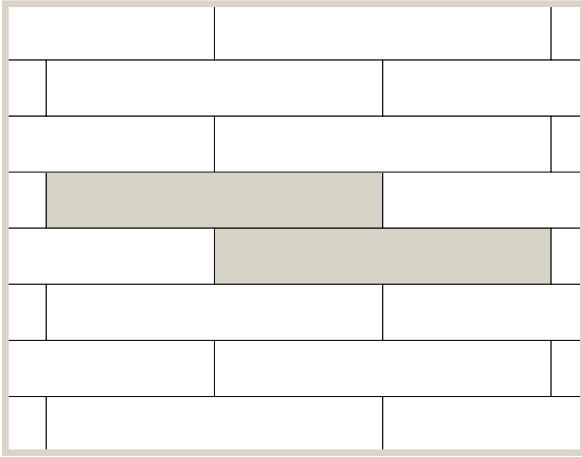

Pattern 1

## INSTALLATION NOTES

Every bundle of coping units will come with 6 left end coping units, 6 right end coping units and 3 regular coping units which have open ends. Available to order in full pallets only. This product can be mechanically installed. To calculate pieces required, multiply the wall length, in feet, by 0.338. This will give you the number of pieces required per layer.

Then multiply this by the number of layers to determine total quantity required. Please note that 0.338 is the multiplier used for both the standard and coping units. The closed end coping does not have the texture as the face does. For in-depth installation guides for specific products, visit [BarkmanConcrete.com](http://BarkmanConcrete.com).

## BUNDLE CONFIGURATIONS

DESCRIPTION	UNIT					PALLET ROW			PALLET				
	SIZE (H X W X D)		FACE AREA		WEIGHT	NO. OF UNITS	FACE AREA		NO. OF UNITS	NO. OF ROWS	FACE AREA		WEIGHT
	MM	IN	M <sup>2</sup>	SQ FT	LB		M <sup>2</sup>	SQ FT			M <sup>2</sup>	SQ FT	LB
Standard	150 x 900 x 285	5.90 x 35.43 x 11.22	0.13	1.45	188.77	-	-	-	15	-	2.02	21.80	2832
Coping	150 x 900 x 285	5.90 x 35.43 x 11.22	0.13	1.45	189.9	-	-	-	15	-	2.02	21.80	2849
Corner	150 x 900 x 285	5.90 x 35.43 x 11.22	0.17	1.45	184.14	-	-	-	10	-	1.35	14.53	1841

### Steinbach Office

152 Brandt Street  
Steinbach, MB R5G 0R2  
T (800)-461-2278  
F (204)-326-5915

### Winnipeg Office

901 Gateway Road  
Winnipeg, MB R2K 3L1  
T (800)-342-2879  
F (204)-663-4854

### Calgary Office

813 McCool St. Box 1136  
Crossfield, AB T0M 0S0  
T (403)-946-4630  
F (403)-946-4631

### Vancouver Office

Port Moody, BC  
T 1 800 461 2278  
F (604)-949-0321

### Merritt Office

1132 Midday Valley Rd  
Merritt, BC V1K 1M9  
T (778)-661-1408

